

Important

This Technical Data Sheet and the corresponding Installation Instructions provide important information to ensure the installed engine will operate according to the design specification in the Volvo Penta application for certification.

Requirements marked with  are considered as critical for exhaust emissions compliance according to the design specification in the Volvo Penta application for certification.

Failing to follow and meet these instructions and requirements when installing a certified engine in a piece of nonroad equipment for use in the United States violates U.S. federal law (40 CFR 1068.105(b)), subject to fines or other penalties as described in the Clean Air Act.

General

In-line four stroke diesel engine with direct injection. Rotation direction, anti-clockwise viewed towards flywheel

Number of cylinders			4
Displacement, total	liters in ³	5,13 313	
Firing order		1-3-4-2	
Bore	mm in	110 4,33	
Stroke	mm in	135 5,31	
Compression ratio		17.5:1	
Wet weight (Not including after treatment system)	Engine only	kg lb	557 1228
	Power pac	kg lb	854 1883
	Power pac, compact cooling package	kg lb	776 1711

Performance

			rpm	1500	1800	2000	2200
ICFN Power	129 kW	without fan	kW hp	126 171	129 175	129 175	129 175
		with fan 600 mm	kW hp	121 164	122 166	122 166	122 166
Torque at:	ICFN Power 129 kW	Nm lbf ft	800 590	685 505	616 454	560 413	
Max torque at engine speed	ICFN Power	1400 rpm	Nm lbf ft		810 597		
Power tolerance			%		±5		
Mean piston speed			m/s ft/sec	6,8 22,1	8,1 26,6	9,0 29,5	9,9 32,5
Effective mean pressure at:	ICFN Power 129 kW		MPa psi	1,96 284	1,68 243	1,51 219	1,37 199
Max combustion pressure at:	ICFN Power 129 kW		MPa psi	14,1 2045	13,6 1972	13,3 1929	13,4 1943
Total mass moment of inertia, J (mR ²) (not including flywheel)			kgm ² lbft ²		0,261 6,2		
Friction Power			kW hp	13 18	18 24	23 31	29 39
Derating see Technical Diagrams							

Cold start performance

*Cold start limit temperature	without starting aid	°C °F	-15 5
	with manifold heater 4 kW	°C °F	-25 -13
	with manifold heater 4 kW and block heater	°C °F	-35 -31
*Specify oil quality	Above -15°C; 15W40 Above -25°C; 10W30 Below -25°C; 5W30		
Block heater type	Make	Power kW	Engaged hours
	Volvo	1,5	Cooling water temp engine block

* See also general section in the sales guide

Lubrication system

Lubricating oil consumption (average)		Vol%	0,05
Oil system capacity including filters		liter US gal	16 4,23
Oil sump capacity:	Max	liter US gal	14 3,57
	Min	liter US gal	10 2,51
Oil change intervals/specifications		h	500
VDS3, VDS4.5		h	1000
VDS3 with oil analysis			
Engine angularity limits:	front up	°	32
	front down	°	32
	side tilt	°	32
Oil pressure at rated speed		kPa psi	420 61

Lubrication system

Lubrication oil temperature in sump:	max	°C °F	125 257
Oil filtration efficiency (in accordance with ISO 4548-12)	97%	μ	36
	50%	μ	14

Fuel system	rpm	1500	1800	2000	2200
Fuel to conform to		EU EN590 US D975, 1-D and 2-D (Max 3000ppm sulphur and 7% FAME) For further information, see service bulletin 18-8-8			
System supply flow at max. speed	liter/h US gal/h	165 43,6			
Fuel supply line max. restriction (Measured at fuel inlet connection)	kPa psi	9 1,3			
Fuel supply line max. pressure, during engine stand still (measured at fuel inlet connection)	kPa psi	20 2,9			
System return flow at max. speed	liter/h US gal/h	111,0 29,3			
Fuel return line max. restriction (Measured at fuel return connection)	kPa psi	10 1,5			
Max. allowable inlet fuel temp (Measured at fuel inlet connection)	°C °F	80 176			
Prefilter / Water separator filtration efficiency	99%	μ	30		
Main fuel filter filtration efficiency (in accordance with ISO 19438)	98% 96%	μ	5 4		
Governor type/make, standard			Volvo / EMS 2.3		
Injection pump type/make			Denso HP3		

Intake and exhaust system		Inlet air temp	rpm	1500	1800	2000	2200
Charge air consumption at: (+25°C and 100kPa)	ICFN Power 129 kW	25°C 77°F	m³/min cfm	9,4 332	10,8 381	11,7 413	12,8 452
	See front page for important information						
Max allowable air intake restriction including piping			kPa psi		6 0,9		
Heat rejection to exhaust at:	ICFN Power 129 kW		kW BTU/min	106 6028	114 6483	120 6824	142 8075
Exhaust gas temperature after turbine at:	ICFN Power 129 kW		°C °F	510 950	482 900	472 882	508 946
	See front page for important information						
Max allowable back pressure in exhaust line (after turbine) Pipe dimension Ø: 127 mm			kPa psi	9 1,3	12 1,7	14 2,0	15 2,2
Exhaust gas flow at: (temp and pressure after turbine at the corresponding power setting)	ICFN Power 129 kW		m³/min cfm	25,0 883	26,9 950	28,2 996	31,6 1116

Cooling system		rpm	1500	1800	2000	2200
Heat rejection radiation from engine at:	ICFN Power 129 kW	kW BTU/min	10 563	9 506	8,5 483	10,1 574
Heat rejection to coolant at:	ICFN Power 129 kW	kW BTU/min	64 3634	67 3810	70,3 3998	80,5 4578
Radiator cooling system type			Closed circuit			
Standard radiator core area	ICFN Power 129 kW	m ² foot ²		0,6 6,46		
Compact cooling package radiator core area	ICFN Power 129 kW	m ² foot ²		0,28 3,01		
Fan diameter	600 mm	ICFN Power 129 kW	mm in	600 23,62		
Maximum fan power consumption	600 mm pull	kW hp	5,1 7	7,2 10	7,2 10	7,2 10
Fan drive ratio	fan Ø600			1.4:1		
Coolant capacity:	engine		liter US gal	13 3,4		
	engine + standard radiator with hoses and expansion tank		liter US gal	47 12,4		
	engine + compact cooling package radiator with hoses and expansion tank		liter US gal	31 8,2		
Coolant pump		drive/ratio		belt/1,4:1		
Coolant flow with standard system		l/s US gal/s	5,4 1,4	6,5 1,7	7,2 1,9	8 2,1
Minimum coolant flow		l/s US gal/s				4,5 1,2
Maximum outer circuit restriction incl. piping		kPa psi		40,0 5,8		
Thermostat:	start to open		°C °F	85 185		
	fully open		°C °F	95 203		
Maximum static pressure head (expansion tank height + pressure cap setting)		kPa psi		110 16,0		
Minimum static pressure head (expansion tank height + pressure cap setting)		kPa psi		85 12,3		
Standard pressure cap setting		kPa psi		100 14,5		
Maximum top tank temperature		°C °F		107 225		
Recommended Draw down capacity. The difference between min coolant level in the expansion tank and the lowest level where the engine's coolant system still are functioning		liter US gal		2 0,5		

Charge air cooler system

			rpm	1500	1800	2000	2200
Heat rejection to charge air cooler	ICFN Power 129 kW	kW BTU/min	25,7 1462	28,2 1604	29,9 1700	34,2 1945	
Charge air mass flow	ICFN Power 129 kW	kg/s	0,188	0,216	0,233	0,254	
Charge air inlet temp. (Charge air temp after turbo compressor)	ICFN Power 129 kW	°C °F	179 354	175 347	174 345	183 361	
	See front page for important information						
Max allowable Charge air outlet temp. (Charge air temp after charge air cooler)		°C °F	43 109	45 113	47 117	50 122	
	See front page for important information						
Maximum pressure drop over charge air cooler incl. piping		kPa psi	6 0,9	8 1,2	10 1,5	12 1,7	
Charge air pressure (After charge air cooler)		kPa psi	196 28,4	197 28,6	192 27,8	194 28,1	
Standard charge air cooler core area		m ² foot ²			0,5 5,38		
Compact charge air cooler core area		m ² foot ²			0,22 2,37		

Cooling performance: 0,6 m² radiator and 600mm fan, pull

Cooling air flow and maximum additional external restriction at different radiator air temperatures based on 107°C TTT and 40% coolant. Valid at 1 atm.

ICFN Power 129 kW							
Engine speed rpm	Engine power kW hp	Air on temp		Air flow		External restriction	
		°C	°F	m ³ /s	ft ³ /s	Pa	psi
2200	129 175	77,7	172	7,3	257,8	0	
		77,1	171	7,2	254,3	100	0,015
		76,5	170	7	247,2	200	0,029
		75	167	6,6	233,1	300	0,044

Cooling performance: 0,28 m² radiator and 600mm fan, pull

Cooling air flow and maximum additional external restriction at different radiator air temperatures based on 107°C TTT and 40% coolant. Valid at 1 atm.

ICFN Power 129 kW							
Engine speed rpm	Engine power kW hp	Air on temp		Air flow		External restriction	
		°C	°F	m ³ /s	ft ³ /s	Pa	psi
2200	129 175	54,5	130	4,6	162,4	0	
		51	124	4,3	151,9	150	0,022
		46,5	116	4	141,3	300	0,044
		42,6	109	3,7	130,7	450	0,065



Engine management system

Functionality		Alternatives			Default setting
Governor mode		Droop	Isochronous		Isochronous
Governor droop		10	125	Nm/rpm	
Governor response		Adjustable PI constants			
Idle speed		600	900	rpm	700
Stop function					Replaced by "Ignition of stop engine"
Preheating function		Ignition	Request	Request + temp	If preheat is available, preheat will be active at ignition on if temp low or demanded by driver.
Lamp test					No lamp test, not used any longer
Ignition of stop engine		Yes	No		No

Engine sensors and switch settings		Alarm level		Engine protection	
Parameter	Unit	Setting range	Default setting	Level	Action. Default/Alternative
Oil temp	°C		125	125	Derate
Oil pressure	kPa		150,0	150	Shut down
	Rated speed	kPa	300	300	Shut down
Coolant temp	°C		107	107	Derate
Coolant level			On	Low level	Derate
Water in fuel		On if closed circuit			
Air filter pressure drop			5kPa		
Altitude, above sea	m				Automatic derating, see section derating
Charge air temp	°C		80	80	Derate
Charge air pressure	kPa		See map		Derate
Engine speed	rpm				Shut down. ON/OFF*

* Off means no shut down, alarm only

Parameter	Warning	Alarm	Derated 0% to engine protection map	Derated 100% to engine protection map	Forced idle after 0 sec	Forced shut down after 0 sec
Coolant temp	103°C	107°C	107°C	110°C		
Oil temp	122°C	125°C	125°C	130°C		
Low oil pressure	Warning map value	Alarm map value		Alarm map value		
High charge air temp	77°C	80°C	80°C	100°C		
High charge air pressure		Alarm map value	Alarm map value			

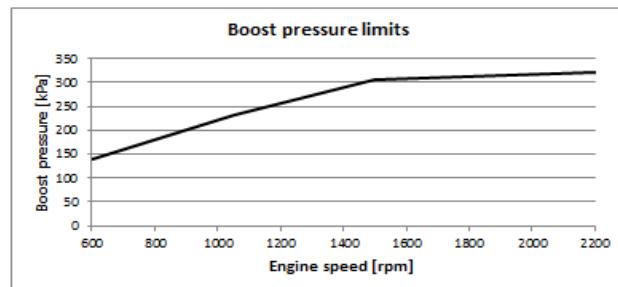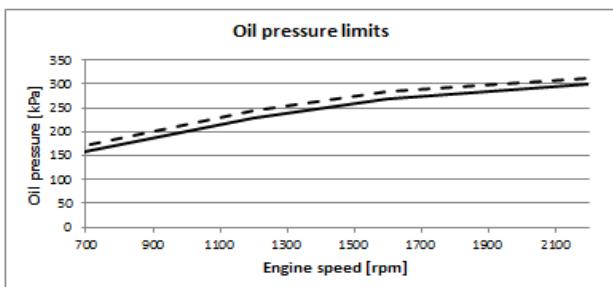

Electrical system

Voltage and type			24V					
Alternator:	make		MELCO					
	output	A	110/130					
	tacho output	Hz/alternator rev.						
	drive ratio							
Starter motor:		make	MELCO					
		type	85P50 / 90P55					
		output	kW	5 / 5.5		6.8 / 7.5		
Number of teeth on:		flywheel	137					
		starter motor	10 / 12 teeth					
Inlet manifold heater (at 20 V)			kW	4				
Power relay for the manifold heater			A	200				



Conditions:	Temperature	°C	25	0	-15
(5 mΩ main circuit resistance@	Battery	Ah / CCA	100/700	100/700	100/700
Crank speed		rpm	197	150	123
Crank current		A	173	265	320
Starter input power during crank		kW	3,90	4,70	5,20
Battery power during crank		kW	4,00	5,10	5,70
Min battery @ 0°C	Ah / CCA				


Power take off		rpm	1400	1800	2000	2200			
Front end in line with crank shaft max.*	0.02 kgm ²	Nm	866	817	750	610			
Flywheel		lbf ft	639	603	553	450			
SAE 2, STD 10" & 11,5 ", 1.303 kgm ²	0.03 kgm ²	Nm	866	748	711	457			
		lbf ft	639	552	524	337			
	0.04 kgm ²	Nm	866	695	645	399			
		lbf ft	639	513	476	294			
Front end belt pulley load.	Max up (above or equal to horizontal line)		kW	3,4	4,1	4,5			
		hp	4,6	5,6	6,1				
	Max down (below horizontal line)		kW	28,4	34,0	37,8			
		hp	38,6	46,2	51,4				
Maximum power on Rear PTO on top of flywheel housing (REPTO):*		kW	75						
		hp	102						
Speed ratio direction of rotation viewed from flywheel side			1:1 Counter clockwise						
Maximum torque on PTO at compressor position:*			Nm	200					
			lbf ft	148					
Speed ratio direction of rotation viewed from flywheel side			1.026:1 Counter clockwise						
Timing gear at hydraulic pump PTO max.*			Nm	80					
			lbf ft	59					
Speed ratio direction of rotation viewed from flywheel side			1.3:1 Clockwise						
Max allowed bending moment in flywheel housing SAE2		Nm	4600						
		lbf ft	3393						
Max. rear main bearing load			N						
			lbf						



* Maximum allowed torque at individual PTO's.



If more than one PTO output is used simultaneously, calculations needs to be performed to determine available maximum.

Available torque depends on application inertia.

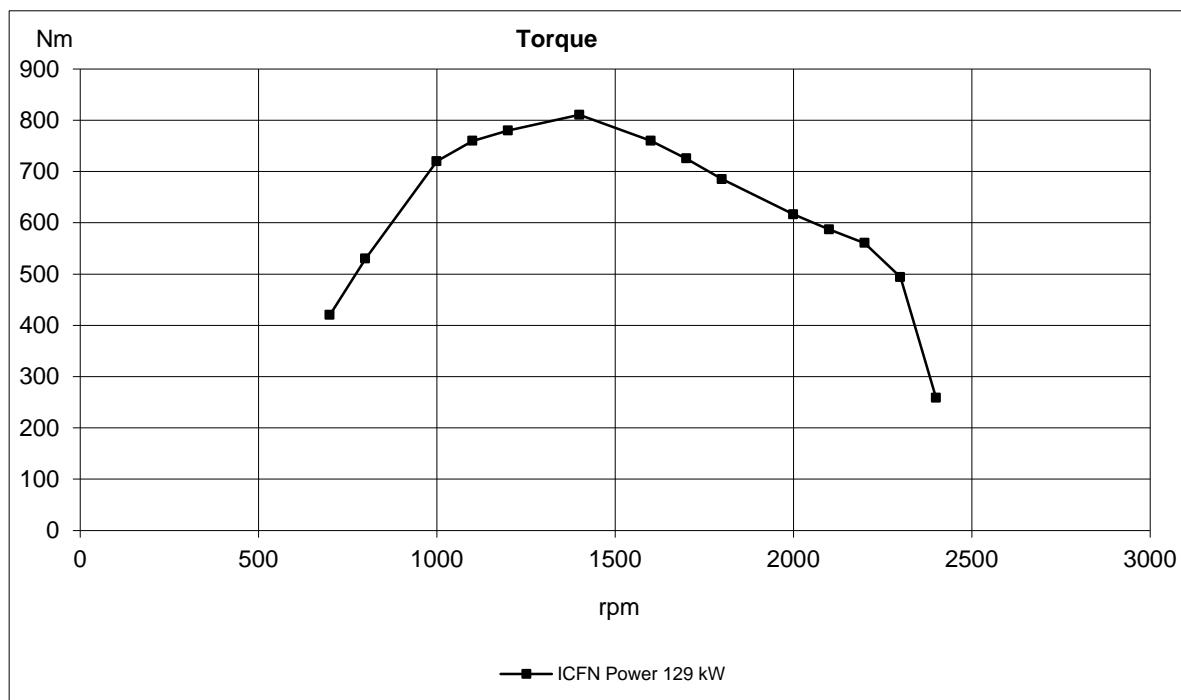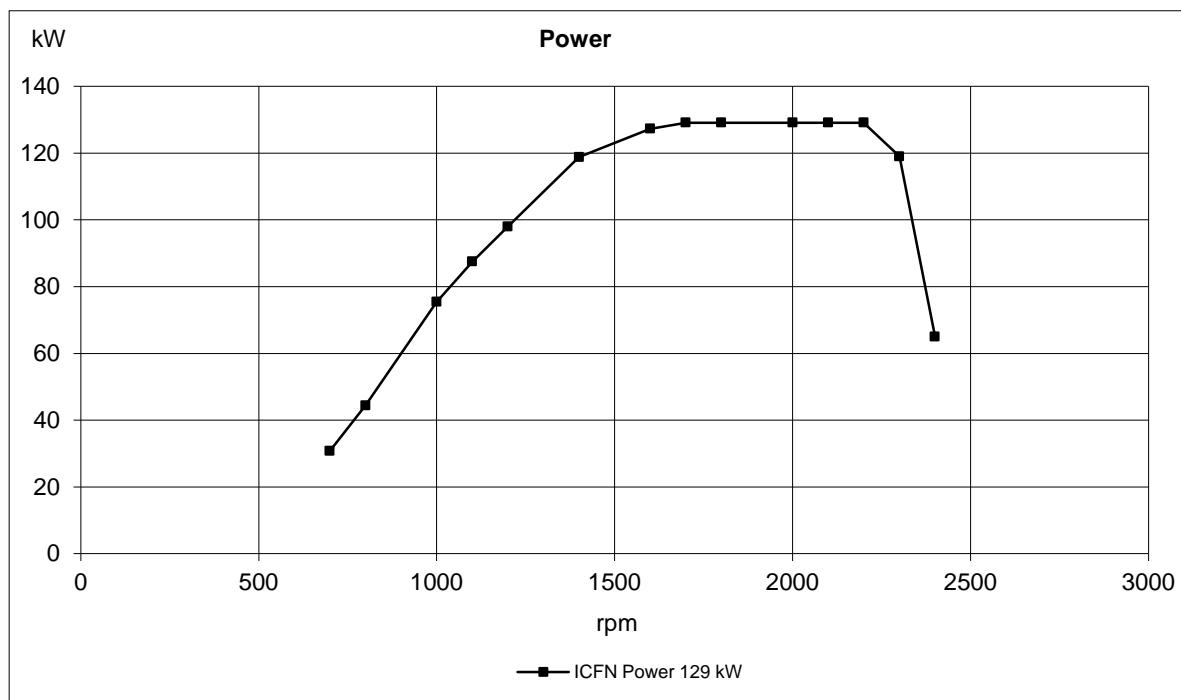

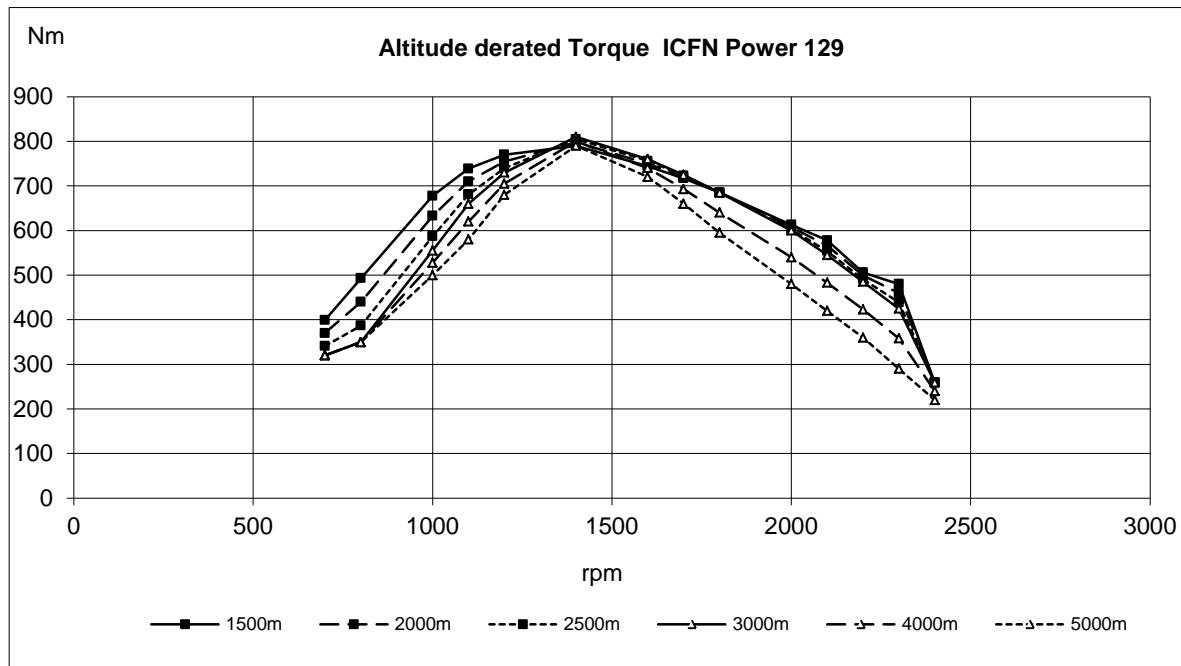


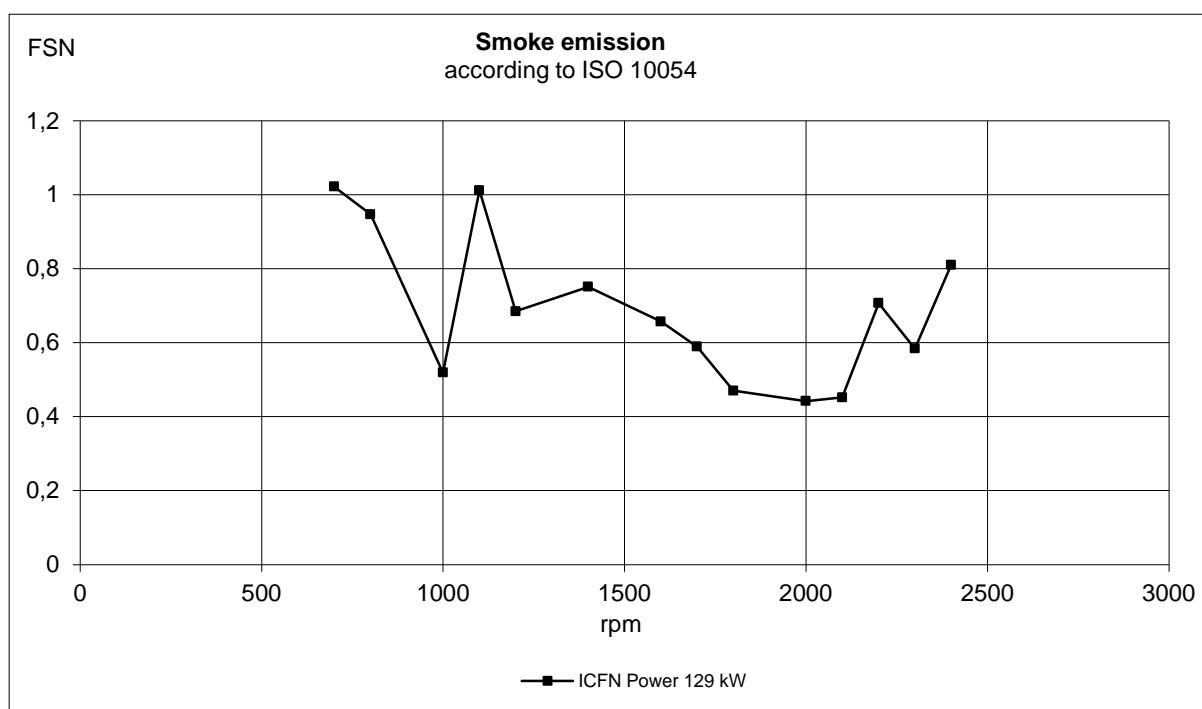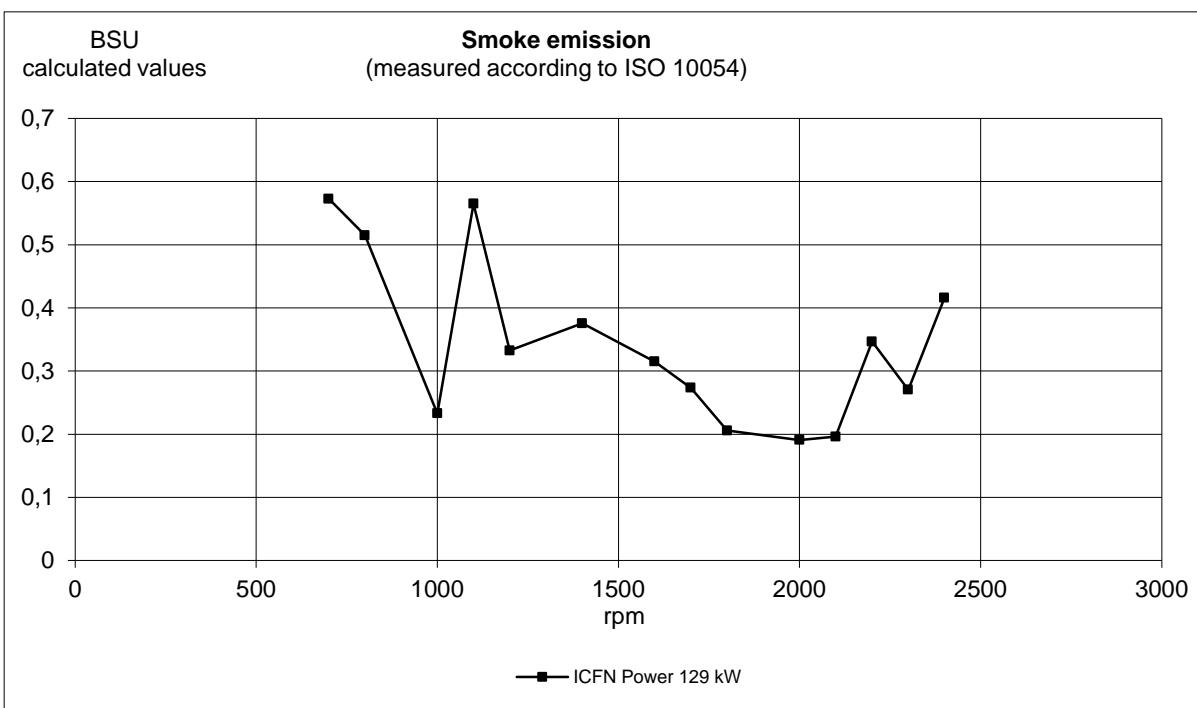


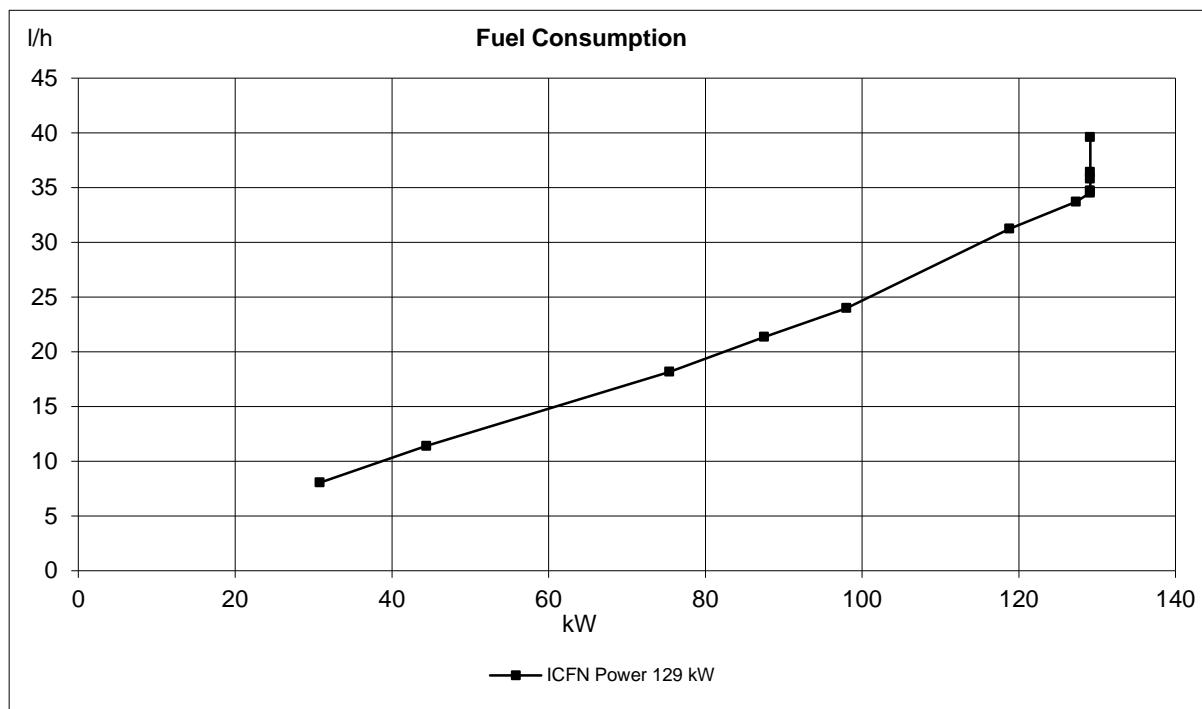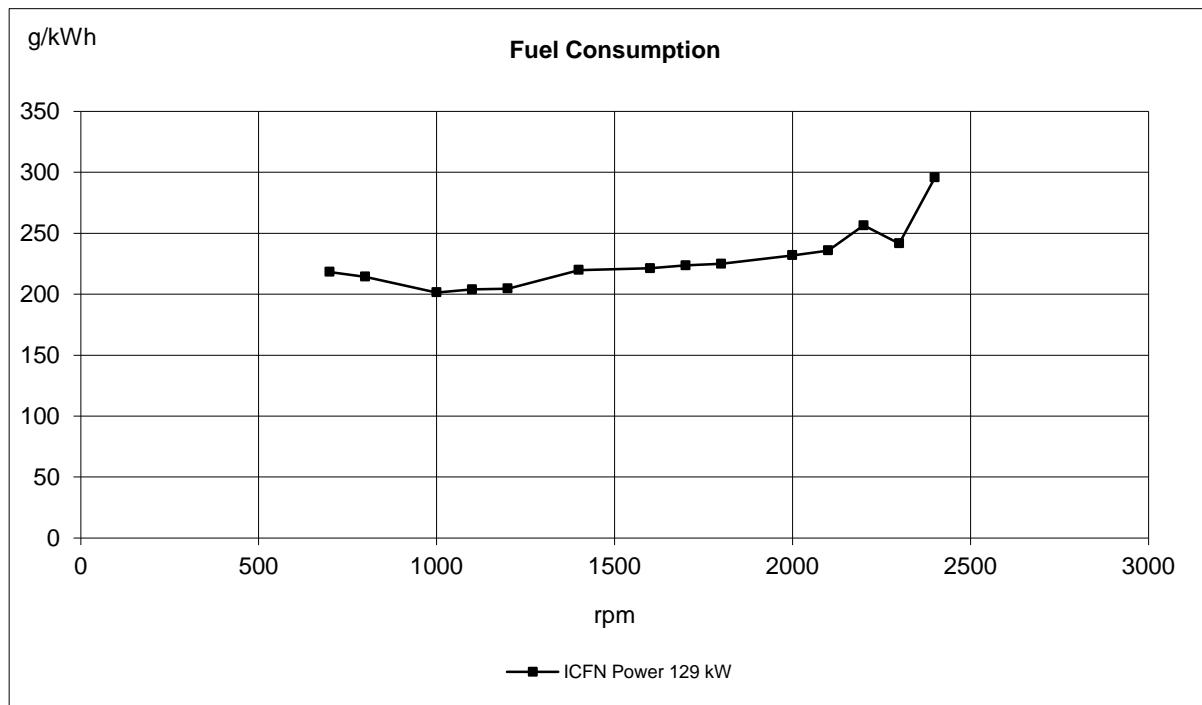


Nm

Maximum Engine Protection derate

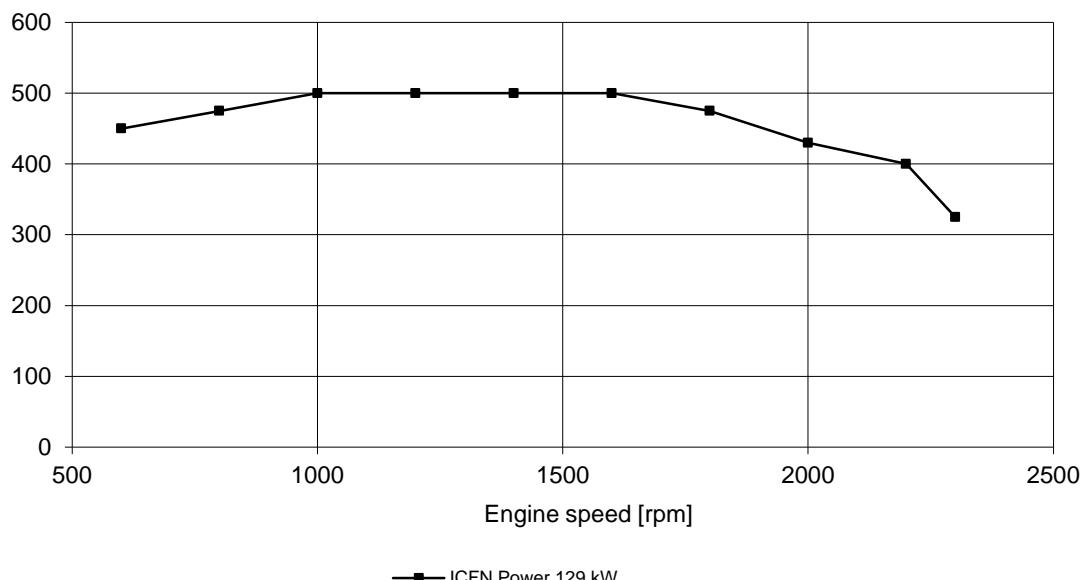

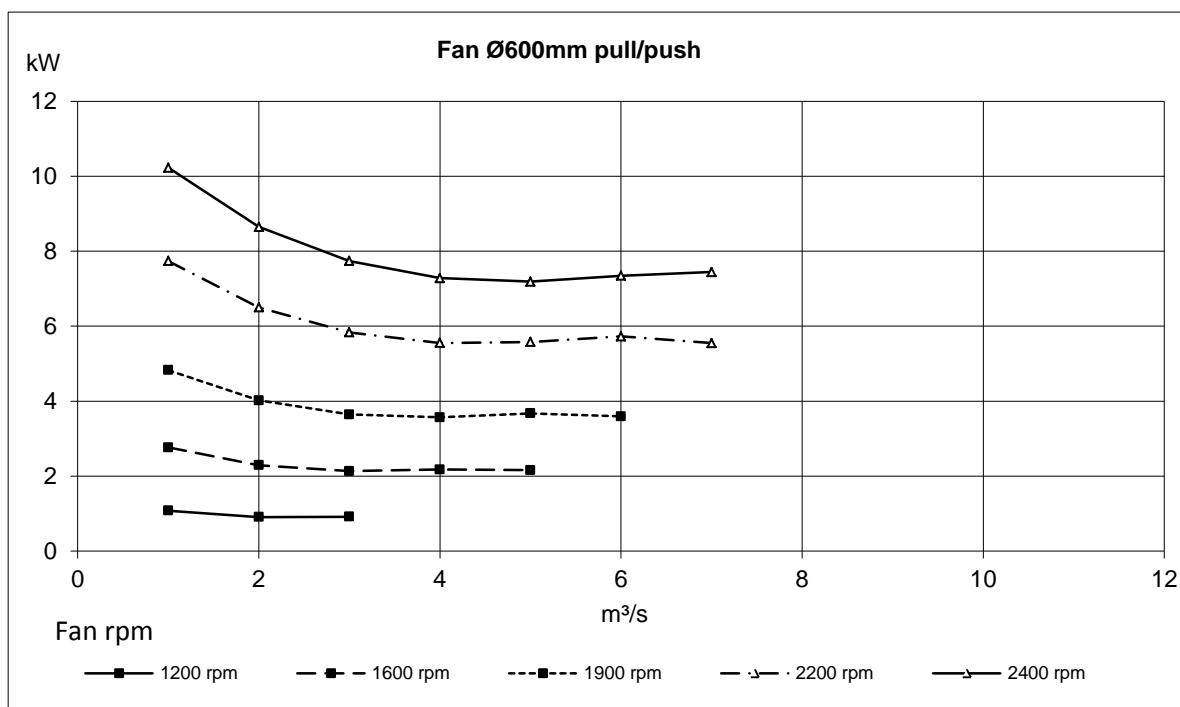

Maximum fan speed with visco clutch: 2400rpm

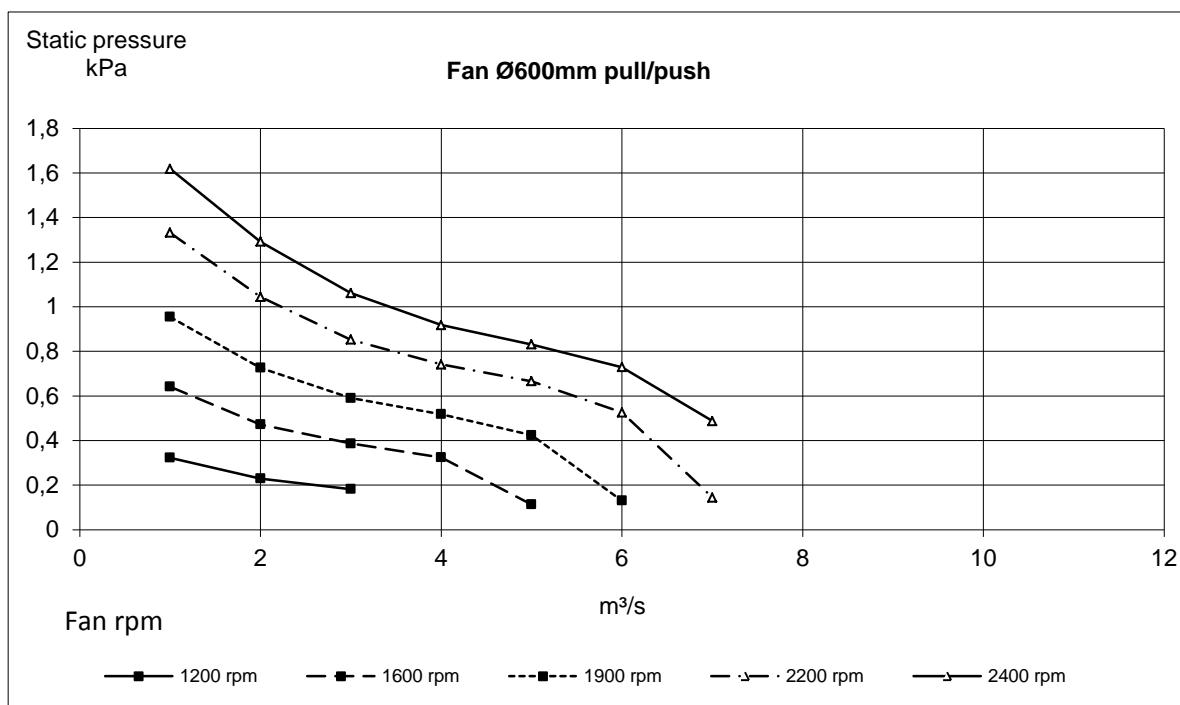

Maximum fan speed with visco clutch: 2400rpm

